



# Disjoncteurs Ph/N

**4500 A** **6000 A**

- Protection magnétothermique
- Bornes décalées 10 mm<sup>2</sup>
- In de 2 à 32 A
- Un 230 V~ 50/60 Hz
- Pdc 4500 A ou 6000 A sous EN 60898-1
- Classe 3
- Courbe de déclenchement C et D




**Fiche technique**  
téléchargeable sur le site



\* Voir les références concernées

Calibre	4,5 kA		6 kA	Module	Emballage
	Courbe C	Courbe D	Courbe C		
2A	01002	-	01502	1	12
6 A	01006	-	01506	1	12
10 A	01010	01210	01510	1	12
16 A	01016	01216	01516	1	12
20 A	01020	01220	01520	1	12
32 A	01032	01232	01532	1	12

## ACCESSOIRES

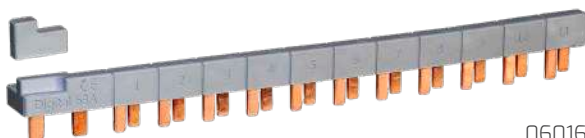

06016



06018

Référence	Description	Emballage
06018	Kit d'alimentation 63 A ID2/5DPN	1
06016	Kit d'alimentation 63 A ID2/11DPN	1
06012	Peigne réversible 63 A	20
06014	Peigne réversible 63 A	1 m
06010	Connecteur 25 mm <sup>2</sup>	20